

Extended IP Server Module



Data Sheet


DESCRIPTION

The Extended IP server module enables the collection of Call Data Records "CDR" from networked phone systems nodes. The SMDR programming for each node needs to be set to Client mode. As calls are made CDR is pushed to the IP address and TCP port on the Callwhere server. Callwhere is programmed to run in the TCP/IP Server mode, the application will listen on the TCP port for Client's to connect. Once connected, Callwhere will collect and process data from each node.

REQUIREMENTS

- Callwhere Pro7 Network version
- All phone system nodes must have unique station numbering
- Local Area, Wide Area, or Virtual Private Network

TOPOLOGY

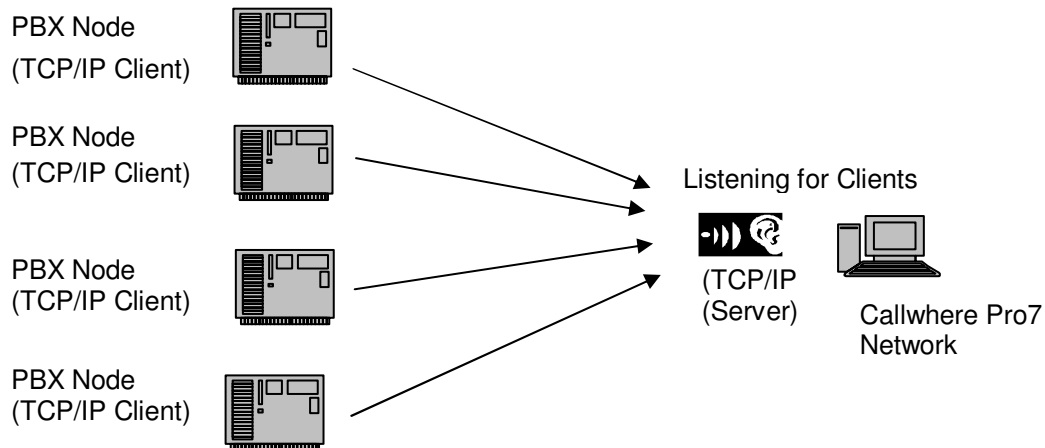

SUPPORTED PHONE SYSTEMS

- Toshiba CTX – Strata Net
- Avaya IP Office
- Avaya Media Servers